

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/72581 A1

- (51) International Patent Classification⁷: H04N 5/00
- (21) International Application Number: PCT/US00/13894
- (22) International Filing Date: 19 May 2000 (19.05.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/135,857 25 May 1999 (25.05.1999) US
09/506,873 16 February 2000 (16.02.2000) US
- (71) Applicant (for all designated States except US): THOMSON LICENSING S.A. [FR/FR]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KLOPFENSTEIN, Scott, Edward [US/US]; 7419 Wood Court, Fishers, IN 46250 (US).
- (74) Agents: TRIPOLI, Joseph, S. et al.; Thomson multimedia Licensing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SYSTEM FOR ACQUIRING AND PROCESSING BROADCAST PROGRAMS, PROGRAM GUIDE AND CHANNEL IDENTIFICATION DATA

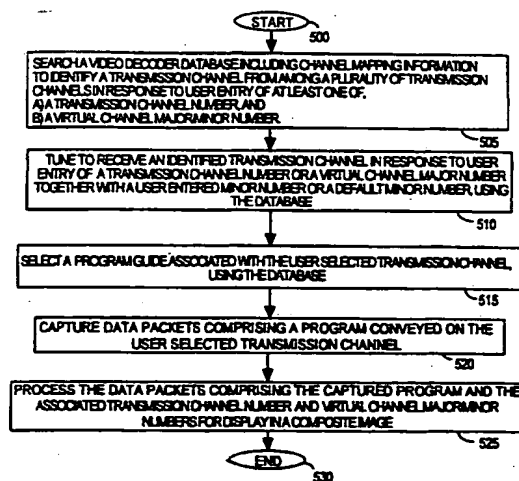

(57) Abstract: A system for acquiring program information conveyed on one of a plurality of broadcast channels involves identifying an individual broadcast channel in response to user entry of either of, (a) a first channel identification number (e.g. a virtual channel identification number) and (b) a different second channel identification number (e.g. a transmission channel identification number). The system is tuned to receive the identified individual broadcast channel and packetized program information is acquired comprising a program conveyed on the individual broadcast channel using an acquired program guide. The packetized program information is processed to be suitable for display. The system also supports navigating within a first list of broadcast channels and a second list of sub-channels associated with individual broadcast channels in response to user activation of first and second navigation controls respectively.

WO 00/72581 A1

AB
REV P F 030022
CITED BY APPLICANT

**A System for Acquiring and Processing Broadcast Programs, Program Guide and
Channel Identification Data**

Field of the Invention

5

This invention is related to the processing of broadcast Program Guides, system information and program specific information.

Background of the Invention

10

In video broadcast and processing applications, digital video data is typically encoded to conform to the requirements of a known standard. One such widely adopted standard is the MPEG2 (Moving Pictures Expert Group) image encoding standard, hereinafter referred to as the "MPEG standard". The MPEG standard is comprised of a system encoding section (ISO/IEC 13818-1, 15 10th June 1994) and a video encoding section (ISO/IEC 13818-2, 20th January 1995). Data encoded to the MPEG standard is in the form of a packetized datastream which typically includes the data content of many program channels (e.g. content corresponding to cable television channels 1-125). Further, several 20 digital services and channels may occupy the frequency spectrum previously occupied by a single analog channel. A 6 MHz bandwidth previously allocated to an analog NTSC compatible broadcast channel may now be split into a number of digital sub-channels offering a variety of services. For example, the broadcast spectrum for RF channel 13 may be allocated to sub-channels including a main 25 program channel, a financial service channel offering stock quotes, a sports news service channel and a shopping and interactive channel. In addition, data conveyed in different sub-channels may be in different data formats (e.g. analog, digital etc.). Further, both the quantity of sub-channels transmitted and the individual sub-channel bandwidth may be changed dynamically to accommodate 30 changing broadcast programming requirements.

In such a digital video system the proliferation in the quantity of services being broadcast and the increased variety of their content, as well as

the ability of a broadcaster to dynamically vary the number and allocated bandwidth of these channels poses a number of problems. Specifically, the increase in the quantity of broadcast channels may increase the difficulty of tuning and lengthen the time required to acquire a selected program channel.

5 Further, as the quantity of channels increases, so does the quantity of ancillary program specific information required in decoding the transmitted program data. The ancillary program specific information includes data used in identifying and assembling packets comprising selected programs and also includes program guide and text information associated with the transmitted program data. The
10 acquisition and management of ancillary program specific information required to receive and decode programs and the management of channel numbering in a digital video system poses additional problems. These problems and derivative problems are addressed by a system according to the invention principles.

15

Summary of the Invention

A system for acquiring program guide information conveyed on one of a plurality of broadcast channels involves identifying an individual broadcast channel in response to user entry of either of, (a) a first channel identification
20 number (e.g. a virtual channel identification number) and (b) a different second channel identification number (e.g. a transmission channel identification number). The system is tuned to receive the identified individual broadcast channel and packetized program information is acquired comprising a program conveyed on the individual broadcast channel using an acquired program guide. The
25 packetized program information is processed to be suitable for display. The system also supports navigating within a first list of broadcast channels and a second list of sub-channels associated with individual broadcast channels in response to user activation of first and second navigation controls respectively.

Brief Description of the Drawings

In the drawing:

5 Figure 1 is a block diagram of digital video receiving apparatus for processing broadcast signals, according to the principles of the invention.

 Figure 2 shows a flowchart of a method for acquiring program guide information conveyed on a transmission channel conveying a user selected
10 broadcast channel and for identifying and associating an individual broadcast channel with a specific program guide, according to the invention.

 Figure 3 shows a flowchart of a decoder initialization method for scanning through received terrestrial broadcast channels to associate individual
15 terrestrial broadcast channels with corresponding program guides, according to the invention.

 Figure 4 shows a flowchart of a decoder initialization method for scanning through received cable broadcast channels to associate individual cable
20 broadcast channels with corresponding program guides, according to the invention.

 Figure 5 shows a flowchart of a method for determining program guide availability on a broadcast channel in response to User entry of a channel
25 identification number or in response to the addition of a new channel to a decoder channel line-up, for example, according to the invention.

 Figure 6 shows a flowchart of a method involving channel number mapping for processing program content data and channel identification numbers
30 to provide a composite image for display, according to the invention.

Figures 7 and 8 show examples of decoder tuning based on channel mapping for an MPEG PSI program guide and an ATSC PSIP compatible program guide respectively, according to the invention.

5

Figure 9 shows a flowchart for a method for acquiring program content data in response to User channel selection via navigation through hierarchically associated channel lists, according to the invention.

10

Figure 10 shows an exemplary program guide display including hierarchically associated channel lists and associated menu navigation controls, according to the invention.

Detailed Description of the Drawings

15

Figure 1 is a block diagram of digital video receiving apparatus for processing broadcast signals. The disclosed system involves processing video signals incorporating ancillary program specific information including program guide data in different encoding formats. These may include, for example, MPEG PSI format compatible with the Program Specific Information (PSI) requirements specified in section 2.4.4 of the MPEG systems standard, or it may comply with the Program and System Information Protocol for Terrestrial Broadcast and Cable, published by the Advanced Television Systems Committee (ATSC), 10 November 1997, hereinafter referred to as the PSIP standard. The data formats may also include analog NTSC type video signal formats conveying program specific information in a vertical blanking interval (VBI) or proprietary and other data formats.

20

25

In a digital video system, an individual channel may be specified by a physical transmission channel (PTC) number determining the carrier frequency of transmission of the channel. An individual channel may also be specified by first and second identification numbers. The first identification number (a major number) is associated with an information provider. The second identification

30

number (a minor number), is used in identifying a broadcast channel from among a group of channels associated with the first identification number. The first and second identification numbers in conjunction, are used in identifying data constituting a program transmitted on the broadcast channel. An exemplary
5 range for a major number is from 1-99 for terrestrial broadcast channels and from 1-999 for cable channels. An exemplary range for a minor number is from 1-999 for both terrestrial and cable channels. A broadcast channel determined from major and minor numbers may alternatively be termed a service or a virtual channel or a logical channel. In a disclosed embodiment, upon system
10 initialization, channel scanning is advantageously performed to associate a particular program guide (e.g. either a PSIP guide, MPEG PSI guide or an analog VBI guide) to an individual channel. A similar procedure is also performed upon introduction of a new channel. Further, the decoder advantageously translates a User entered PTC number into a combination major-minor number for display.

15 The principles of the invention may be applied to terrestrial, cable, satellite, Internet or computer network broadcast systems employing different coding types or modulation formats. Such systems may include, for example, non-MPEG compatible systems, involving other types of encoded datastreams and other methods of conveying program specific information. Further, although
20 the disclosed system is described as processing broadcast programs, this is exemplary only. The term 'program' is used to represent any form of packetized data such as audio data, telephone messages, computer programs, Internet data or other communications, for example.

 In the video receiver system of Figure 1 (system 20), a terrestrial
25 broadcast carrier modulated with signals carrying audio, video and associated data representing broadcast program content is received by antenna 10 and processed by unit 13. The resultant digital output signal is demodulated by demodulator 15. The demodulated output from unit 15 is trellis decoded, mapped into byte length data segments, deinterleaved and Reed-Solomon error
30 corrected by decoder 17. The corrected output data from unit 17 is in the form of an MPEG compatible transport datastream containing program representative multiplexed audio, video and data components. The transport stream from unit

17 is demultiplexed into audio, video and data components by unit 22 which are further processed by the other elements of decoder system 100. These other elements include video decoder 25, audio processor 35, sub-picture processor 30, on-screen graphics display generator (OSD) 37, multiplexer 40, NTSC encoder 45 and storage interface 95. In one mode, decoder 100 provides MPEG decoded data for display and audio reproduction on units 50 and 55 respectively. In another mode, the transport stream from unit 17 is processed by decoder 100 to provide an MPEG compatible datastream for storage on storage medium 98 via storage device 90. In an analog video signal processing mode, unit 19 processes a received video signal from unit 17 to provide an NTSC compatible signal for display and audio reproduction on units 50 and 55 respectively.

In other input data modes, units 72, 74 and 78 provide interfaces for Internet streamed video and audio data from telephone line 18, satellite data from feed line 11 and cable video from cable line 14 respectively. The processed data from units 72, 74 and 78 is appropriately decoded by unit 17 and is provided to decoder 100 for further processing in similar fashion to that described in connection with the terrestrial broadcast input via antenna 10.

A user selects for viewing either a TV channel or an on-screen menu, such as a program guide, by using a remote control unit 70. Processor 60 uses the selection information provided from remote control unit 70 via interface 65 to appropriately configure the elements of Figure 1 to receive a desired program channel for viewing. Processor 60 comprises processor 62 and controller 64. Unit 62 processes (i.e. parses, collates and assembles) program specific information including program guide and system information and controller 64 performs the remaining control functions required in operating decoder 100. Although the functions of unit 60 may be implemented as separate elements 62 and 64 as depicted in Figure 1, they may alternatively be implemented within a single processor. For example, the functions of units 62 and 64 may be incorporated within the programmed instructions of a microprocessor. Processor 60 configures processor 13, demodulator 15, decoder 17 and decoder system 100 to demodulate and decode the input signal format

and coding type. Units 13, 15, 17 and sub-units within decoder 100 are individually configured for the input signal type by processor 60 setting control register values within these elements using a bi-directional data and control signal bus C.

5 The transport stream provided to decoder 100 comprises data packets containing program channel data and program specific information. Unit 22 directs the program specific information packets to processor 60 which parses, collates and assembles this information into hierarchically arranged tables. Individual data packets comprising the User selected program channel are
10 identified and assembled using the assembled program specific information. The program specific information contains conditional access, network information and identification and linking data enabling the system of Figure 1 to tune to a desired channel and assemble data packets to form complete programs. The program specific information also contains ancillary program guide information
15 (e.g. an Electronic Program Guide - EPG) and descriptive text related to the broadcast programs as well as data supporting the identification and assembly of this ancillary information.

 In acquiring program guide information, decoder 100 (with processor 60) determines whether a received signal represents an analog or
20 digital channel and also determines the type of program guide information available on the received channel. An analog channel VBI guide or a digital program guide (an MPEG PSI type guide or an ATSC PSIP type guide, for example) may then be subsequently acquired. Upon determining whether a PSIP, MPEG PSI, or VBI guide is present for a broadcast channel, or whether the
25 broadcast channel is an analog channel with no VBI guide, decoder 100 (with unit 60) updates stored database information to associate one of the guides with the desired broadcast channel.

 The different types of program specific information and program guides (e.g. PSIP, MPEG PSI, or VBI guide) are acquired and assembled by
30 processor 60 to form their respective data structures. Processor 60 assembles a digital ATSC PSIP guide (and also an MPEG PSI guide), for example, into multiple hierarchically arranged and inter-linked tables. Similarly, processor 60 assembles

analog VBI data to form a program guide database for use in performing program related decoder functions (e.g. time shifted program recording) and a guide for display in accordance with the system requirements.

An exemplary hierarchical PSIP table arrangement includes a Master Guide Table (MGT), a Channel Information Table (CIT), Event Information Tables (EITs) and optional tables such as Extended Text Tables (ETTs). The MGT contains information for acquiring program specific information conveyed in other tables such as identifiers for identifying data packets associated with the other tables. The CIT contains information for tuning and navigation to receive a User selected program channel. The EIT contains descriptive lists of programs (events) receivable on the channels listed in the CIT. The ETT contains text messages describing programs and program channels. Additional program specific information describing and supplementing items within the hierarchical tables is conveyed within descriptor information elements. The resulting program specific information data structure formed by processor 60 via unit 22 is stored within internal memory of unit 60.

If the acquired program specific information is conveyed in MPEG PSI format it is similarly formed into tables in accordance with the MPEG systems standard section 2.4.4. These tables may include a Program Association Table (PAT), a Program Map Table (PMT), and may also include a Network Information Table (NIT) and a Conditional Access Table (CAT). Each table is formed from data packets that are recognized by a particular PID. The PMT defines the PID labels that identify the individual packetized datastreams that constitute a program. These individual streams are termed elementary streams. Elementary streams include datastreams such as a video datastream and individual audio datastreams for various languages as well as caption datastreams. The PAT associates a program number with the PIDs that permit identification and assembly of the packets comprising the PMT. The NIT is optional and may be structured and used to define physical network parameters such as satellite transmission channel frequencies and transponder channels, for example. The CAT contains the conditional access information such as encryption codes that govern access to programs that are dependent upon user

entitlement.

Figures 2-5 show methods employed by processor 60 in controlling the decoder of Figure 1 in acquiring different types of program guide information (e.g. analog-VBI type, MPEG PSI type or ATSC PSIP type) conveyed on multiple broadcast channels for use in capturing packetized program information comprising a program conveyed on an individual broadcast channel. Specifically, Figure 2 shows a flowchart of a method for acquiring program guide information and for identifying and associating an individual broadcast channel with a specific program guide. This advantageously reduces the need to search for a guide to be used in processing a future selected broadcast channel and reduces program and channel acquisition times. In step 105, following the start at step 100, processor 60 directs system 20 to tune to receive a physical transmission channel (PTC) conveying a user selected broadcast channel. If the received broadcast channel is digital, processor 60, in step 110, examines the data received on the channel to identify which program guides are available by looking firstly for a PSIP type of guide and then an MPEG PSI type of guide. If the received broadcast channel is analog (e.g. NTSC compatible), processor 60, in step 110, parses any data conveyed in the vertical blanking interval (VBI) of the analog signal to identify whether one or more program guides are available. In the event that both a PSIP guide and an MPEG PSI guide are available, processor 60 in step 115, selects a PSIP guide (designated as the highest priority guide) for acquisition and updates an internal database to associate the received broadcast channel with the selected PSIP guide. The PSIP guide is selected as the highest priority guide in accordance with a predetermined guide priority profile. In step 120, processor 60, in conjunction with demultiplexer 22, acquires PSIP data packets and assembles them to form a PSIP guide data structure within the unit 60 internal memory.

In an alternative embodiment, multiple guides (e.g. a PSIP and an MPEG PSI guide) may be acquired and assembled. The multiple guides may be compared and used by processor 60 to identify errors in the guide data or to identify additional broadcast services that are listed in one guide and omitted in another. Thereby, processor 60 may add such additional services to a user's

service list by capture of data supporting user access to these services. In step 125, processor 60 parses the captured PSIP guide data to derive information supporting generation of a displayed program guide listing. The displayed program guide shows a user the programs and events and associated scheduled broadcast times available on the received physical transmission channel (PTC). Processor 60 in conjunction with decoder 100 processes the parsed information and presents the program guide listing display on reproduction device 50. The displayed program guide lists programs for the received transmission channel and the other available channels. In step 130, processor 60 uses the acquired PSIP guide data in directing decoder 100 in the capture and assembly of packetized data to form a program being broadcast on the user selected broadcast channel. The process of Figure 2 terminates at step 135.

Figure 3 shows a flowchart of an initialization method employed by processor 60 and decoder 100 involving iterative scanning through received terrestrial broadcast channels to associate individual terrestrial broadcast channels with corresponding program guides. Such an initialization method may be performed at power-on, or during low use periods (e.g. during the night) or during a background operation that is invisible to a User, for example. However, this type of scanning operation may not identify guides available for a newly added broadcast channel. Following the start at step 200, processor 60, in step 205, directs system 20 (the Figure 1 decoder) to tune to receive a next available terrestrial broadcast channel using previously stored physical transmission channel (PTC) tuning information. Further, processor 60, in step 210, directs system 20 to attempt to acquire a digital PSIP guide conveyed on this terrestrial broadcast channel. If processor 60 is successful, it stores the PSIP guide in internal memory and updates an internal database to associate this particular received channel as a PSIP guide type channel (steps 215 and 220 respectively). If acquisition of a PSIP guide was unsuccessful in step 215, processor 60 determines if the received broadcast channel is analog and if so acquires a program guide conveyed in VBI data (if available) in steps 225 and 230 respectively. If the received broadcast channel is not analog (step 225), processor 60 attempts to acquire a digital MPEG PSI guide comprising a program

map table and a program association table (PMT and PAT). If processor 60 is successful, it stores the MPEG PSI guide in internal memory and updates the internal database to associate this particular received channel as an MPEG PSI guide type channel (steps 240 and 245 respectively). If acquisition of an MPEG PSI guide was unsuccessful in step 240, processor 60 identifies this particular received channel as being without an associated guide in step 250. Following the update of its internal database in steps 220, 230, 245 or 250, processor 60 repeats the channel scanning process by tuning to receive the next terrestrial broadcast channel in step 205. This iterative process is repeated until all the available terrestrial broadcast channels have been scanned and the process is complete at step 207.

Figure 4 shows a flowchart of an initialization method employed by processor 60 and decoder 100 involving iterative scanning through received cable broadcast channels to associate individual cable broadcast channels with corresponding program guides. Following the start at step 300, processor 60 in step 305 directs system 20 to tune to receive a next available cable broadcast channel using previously stored physical transmission channel (PTC) tuning information. Further, processor 60, in step 310, directs system 20 to attempt to acquire a digital MPEG PSI guide conveyed on this cable broadcast channel. If processor 60 is successful, it stores the MPEG PSI guide in internal memory and updates an internal database to associate this particular received channel as an MPEG PSI guide type channel (steps 315 and 320 respectively). If acquisition of an MPEG PSI guide was unsuccessful in step 315, processor 60 determines if the received broadcast channel is analog and if so acquires a program guide conveyed in VBI data (if available) in steps 325 and 330 respectively. If the received broadcast channel is not analog (step 325), processor 60 identifies this particular received channel as being without an associated guide in step 335. Following the update of its internal database in steps 320, 330 and 335, processor 60 repeats the channel scanning process by tuning to receive the next cable broadcast channel in step 305. This iterative process is repeated until all the available cable broadcast channels have been scanned and the process is complete at step 307.

Figure 5 shows a flowchart of a method for determining program guide availability on a broadcast channel in response to User entry of a channel identification number or in response to the addition of a new channel to a decoder channel line-up, for example. Following the start at step 400 and in response to User entry of a channel identification number, processor 60 in step 405 determines from its internal database if the User entered identification number corresponds to a previously scanned channel and is associated with an identified program guide. If a program guide is associated with the selected channel and has been previously acquired, processor 60 in step 430 directs system 20 to tune to receive the selected channel using this previously acquired program guide information. If the selected channel is a channel being received for the first time and has no associated program guide information (e.g. a channel being added to a User's channel line-up), processor 60 initiates a program guide availability scan. Processor 60 in step 410, directs system 20 to tune to receive the selected broadcast channel using previously stored physical transmission channel (PTC) tuning information and attempts to acquire a digital PSIP guide conveyed on the selected broadcast channel. If processor 60 is successful, it stores the PSIP guide in internal memory and updates an internal database to associate the selected channel as a PSIP guide type channel (step 415).

In step 430, processor 60 directs system 20 to tune to receive the selected channel using this previously acquired PSIP guide information. If acquisition of a PSIP guide was unsuccessful in step 410, processor 60 determines if the received broadcast channel is analog and if so acquires a program guide conveyed in VBI data (if available) in steps 420 and 425 respectively. Processor 60 directs system 20 to tune to receive the analog channel using pre-stored PTC tuning information in step 430. If the received broadcast channel is not analog (step 420), processor 60 attempts to acquire a digital MPEG PSI guide comprising a program map table and a program association table (PMT and PAT). If processor 60 is successful, it stores the MPEG PSI guide in internal memory, updates the internal database to associate this particular received channel as an MPEG PSI guide type channel and initiates

tuning to receive the selected channel (steps 435, 440 and 430 respectively). If the selected channel was digital and neither PSIP nor MPEG PSI guides were acquired, processor 60 in step 445 initiates repetition of the guide acquisition process from step 410. This iterative process is repeated for a limited number of attempts (e.g. four attempts) or for a limited duration. If, following these attempts, a guide was not acquired, the channel is identified to a User as unobtainable via an on screen message. In certain situations such as during a satellite antenna tuning operation, this process may be set to repeat continuously as part of a channel tuning operation

10 Figures 6-9 show methods employed by processor 60 for channel number mapping and navigation through channel lists for use in acquiring a User selected channel using different types of pre-stored program guide information. Specifically, Figure 6 shows a flowchart of a method involving channel number mapping for processing program content data and channel identification numbers to provide a composite image for display. In step 505, following the start at step 15 500, processor 60 searches a previously acquired database of channel information for the available channels. This database information was accumulated during prior channel scanning operations. Processor 60 searches the database to identify a User selected broadcast channel conveying a desired program in response to User entered physical transmission channel (PTC) 20 channel number and either (or both of) a virtual channel major number and a virtual channel minor number. The database associates physical transmission channel (PTC) channel numbers with a virtual channel major number and a virtual channel minor number in a channel map. The channel map advantageously 25 enables identification of a specific broadcast channel conveying a User desired program from entry of a PTC with a minor number or from entry of a major number together with a minor number. In an alternative embodiment, this channel identification number conversion may be performed using a predetermined and stored algorithm or formula. In the event that a User does not 30 enter a minor number a default value of zero is assumed, however, the default minor number is programmable and may be set to another minor channel number. In step 510, processor 60 directs system 20 to tune to receive the User

selected broadcast channel identified using its internal database.

In step 515 processor 60 examines its internal database to identify the type of program guide associated with the User selected transmission channel. In the event that more than one guide is available (e.g. both a PSIP and an MPEG PSI guide), processor 60 selects one guide (e.g. a PSIP guide) for use based on a predetermined guide priority. In step 520, processor 60 in conjunction with demultiplexer 22 of decoder 100, acquires data packets comprising a program conveyed on the User selected broadcast channel. In step 525, processor 60, in conjunction with decoder 100, assembles the acquired packets and processes them to form program images (representing the program being broadcast on the user selected broadcast channel) for display. The program images are advantageously displayed together with the associated PTC number and major and minor numbers on reproduction device 50. The process of Figure 6 terminates at step 530.

Figures 7 and 8 show examples of channel selection and decoder tuning based on channel mapping for an MPEG PSI program guide and an ATSC PSIP compatible program guide respectively. The examples show selecting a virtual channel (or sub-channel) and corresponding virtual channel numbers for display when multiple guides and multiple virtual channel identification numbers are being broadcast. Specifically, Figure 7 shows two channel selection examples and uses MPEG PSI guide information conveyed on physical transmission channel 50 with sub-channels 50-1, 50-2, 50-3 and 50-4. In the first example, a User enters the number 50 via remote unit 70 (Figure 1) to select physical transmission channel 50 (e.g. NBC). Note, the User may alternatively select the number 50 by menu item selection in a graphical user interface or use a different data entry device such as a keyboard or discrete switches, for example. Processor 60 (Figure 1) recognizes that an MPEG PSI guide is associated with PTC 50 from its internal database. Further, processor 60 employs the previously stored MPEG PSI guide data in directing system 20 to tune to PTC 50 and to capture, process and display the program images of broadcast channel 50-1 (e.g. the NBC-1 sports sub-channel) identified by default minor number 1. These images are displayed together with the broadcast

channel number 50-1. In another embodiment, the channel logo and minor number, e.g. NBC-1 is displayed instead of, or in addition to, the number 50-1.

In the next example in Figure 7, a User enters the numbers 50 and 2 via remote unit 70 (Figure 1) to select a specific broadcast channel being conveyed on physical transmission channel 50. Processor 60 uses previously acquired MPEG PSI data in directing system 20 to tune to PTC 50 and to capture, process and display program data conveyed on this channel. The processed program data is displayed together with the broadcast channel number 50-2 (e.g. NBC-2 movie channel) identified by the User entered minor number 2. These images are displayed together with the broadcast channel number 50-2.

Figure 8 shows four channel selection examples employing ATSC PSIP guide information conveyed on physical transmission channel 50 with virtual channels 99-0, 99-1, 99-2 and 99-3. It is to be noted that different received program guides support different channel mapping structures. A PSIP guide contains channel map data associating a physical transmission channel (PTC) with a major channel number that is associated with a specific broadcaster. As such a PSIP channel map may associate channel 99 with PTC 50 and information provider (i.e. broadcaster) NBC, for example. Therefore, a decoder may advantageously use this mapping data to display selected channel identification numbers or all the different channel identification numbers as well as the channel logo and minor number, e.g. NBC-1. In contrast, a conventional MPEG PSI guide does not fully support such a mapping.

In the first example in Figure 8, a User enters the number 50 via remote unit 70 (Figure 1) to select physical transmission channel 50 (e.g. NBC). Processor 60 recognizes that an ATSC PSIP guide is associated with PTC 50 from its internal database. Further, processor 60 employs previously acquired PSIP guide data in directing system 20 to tune to PTC 50 and to capture, process and display a program conveyed on PTC 50 equivalent to virtual channel 99-0 identified by default minor number 0. Note, a different default minor number may be used to identify a particular broadcast channel in one guide channel mapping system (e.g. a PSIP guide system) than in a different guide

channel mapping system (e.g. an MPEG PSI guide system). The processed program is displayed together with the broadcast channel number 99-0 derived from the PSIP channel map.

The next example of Figure 8 differs from the first described example in that the User enters minor number 2 as well as PTC number 50. System 20 and processor 60 apply both of these numbers in determining from the previously acquired PSIP channel map that system 20 is to tune to PTC 50 to acquire a program on virtual channel number 99-2 for display together with channel number 99-2.

In the next example of Figure 8, the User enters broadcast channel number 99. System 20 and processor 60 determines from the previously acquired PSIP channel map that channel 99 maps to PTC 50 and system 20 tunes to PTC 50 to acquire a program on default broadcast channel number 99-0 for display together with the identification number 99-0. Note, default minor number for channel 99 is 0.

The last example of Figure 8 differs from the previous described example in that the User enters minor number 2 as well as virtual broadcast channel number 99. System 20 and processor 60 apply both of these numbers in determining from the previously acquired PSIP channel map that system 20 is to tune to PTC 50 to acquire a program on broadcast channel number 99-2 for display together with channel number 99-2.

Figure 9 shows a flowchart of a method for use by processor 60 and system 20 (Figure 1) in acquiring program content data in response to User channel selection via navigation through hierarchically associated broadcast channel lists. Figure 10 shows an exemplary program guide display including hierarchically associated channel lists and associated menu navigation controls. In step 805 of Figure 9, following the start at step 800, processor 60 directs system 20 to navigate through a first list of broadcast channels in response to User activation of a first navigation control in order to select a broadcast channel identified by a virtual channel number. Such a list of channels may take the form of a program guide channel list exemplified by virtual channel numbers 107-111 (A&E, NBC etc.) in the left column of Figure 10. Further, the first navigation

control may be any form of User interface control such as a channel increment or decrement button on remote unit 70 (Figure 1) or a cursor based control involving activation of icon 957 of Figure 10, for example, or some other form of control. Upon selection or highlighting of the desired broadcast channel identified by a virtual channel number e.g. NBC channel 108 (item 905 Figure 10) the corresponding physical transmission channel number is displayed e.g. PTC 50 for channel 108 (item 910 Figure 10). In addition, the corresponding sub-channels available for channel 108 including channels 108-0, 108-1, and 108-2 in this example, are displayed in a hierarchically arranged sub-menu (menu 930 of Figure 10).

In step 810 of Figure 9, processor 60 directs system 20 to navigate through the second list of broadcast sub-channels (menu 930) hierarchically associated with the selected broadcast channel in response to User activation of a second navigation control. This is done in order to select a desired sub-channel, identified by a virtual channel minor number, for viewing or recording, for example. In exemplary Figure 10, the second list comprises sub-channels 108-0, 108-1, 108-2 (items 915, 920 and 925) hierarchically displayed for selected broadcast channel 108. The second navigation control, like the first navigation control, may be any form of User interface control such as a channel increment or decrement button on remote unit 70 (Figure 1) or a cursor based control involving activation of icon 940 of Figure 10, for example, or some other form of control.

In step 815 of Figure 9, processor 60 directs system 20 to tune to receive the channel conveying data comprising a program on the sub-channel selected in step 810. Processor 60 employs previously acquired program guide information including tuning information associated with the selected sub-channel stored in its internal database in configuring system 20 to tune to receive the selected sub-channel. In step 820, processor 60 directs system 20 in the capture and assembly of packetized data to form the program being broadcast on the user selected sub-channel. The process of Figure 9 terminates at step 825.

The architecture of Figure 1 is not exclusive. Other architectures may be derived in accordance with the principles of the invention to accomplish the same objectives. Further, the functions of the elements of system 20 of Figure 1 and the process steps of Figures 2-9 may be implemented in whole or in part within the programmed instructions of a microprocessor. In addition, the principles of the invention apply to any form of analog or digital program specific (and program guide) information (including non-MPEG compatible program guide information).

1. In a video decoder, a system for acquiring packetized program information comprising a program conveyed on one of a plurality of broadcast
5 channels, comprising the steps of:

identifying an individual broadcast channel of said plurality of broadcast channels in response to user entry of either of, (a) a first channel identification number and (b) a different second channel identification number;

tuning to receive said identified individual broadcast channel;

10 acquiring packetized program information comprising a program conveyed on said individual broadcast channel using an acquired program guide; and

processing said packetized program information to be suitable for display.

15

2. A system according to claim 1, wherein

said first channel identification number is a transmission channel identification number, and

20 said second channel identification number is a virtual channel identification number.

3. A system according to claim 2, including the step of

displaying said second channel identification number together with said program, in response to entry of said first channel identification number.

25

4. A system according to claim 1, wherein

said second channel identification number is comprised of two elements, a major number and a minor number.

30

5. A system according to claim 4, including the step of

displaying said major number and minor number together with said program, in response to entry of said first channel identification number.

6. A system according to claim 2, including the step of displaying said first channel identification number together with said program in response to entry of said second channel identification number.

5

7. A system according to claim 1, wherein said second channel identification number is comprised of two elements, a major number and a minor number, and in absence of user entry of said minor number a default minor number is used.

10

8. A system according to claim 1, wherein said second channel identification number comprises a major number and a minor number, wherein said major number is associated with both an information provider and a group of sub-channels, and said minor number identifies a sub-channel from among said group of sub-channels.

15

9. A system according to claim 8, wherein said first channel identification number is a transmission channel identification number, and said tuning step includes tuning to receive a sub-channel comprising said identified individual broadcast channel in response to user entry of said transmission channel identification number and said minor number.

20

25

10. A system according to claim 1, wherein in said identifying step said individual broadcast channel is identified using acquired program guide information.

11. A system according to claim 1, including the step of
searching a database to identify an individual broadcast channel of
said plurality of broadcast channels in response to user entry of either of, said
5 first channel identification number and said different second channel
identification number.

12. In a video decoder, a system for acquiring packetized program
information comprising a program conveyed on one of a plurality of broadcast
10 channels, comprising the steps of:

acquiring a program guide containing information mapping a first
broadcast channel number to a different second channel number, said acquired
program guide being one of a plurality of different available program guides
including a program guide omitting said mapping information;

15 tuning to receive said second channel in response to user entry of
said first broadcast channel number using said acquired program guide;

acquiring packetized program information comprising a program
conveyed on said second channel.

20 13. A system according to claim 12, wherein
said first broadcast channel number is a virtual channel
identification number, and

said second channel identification number is a transmission channel
identification number.

25

14. A system according to claim 12, wherein

said first broadcast channel number is comprised of two elements,
a major number and a minor number.

15. A system according to claim 12, wherein
said first broadcast channel number is comprised of two elements,
a major number and a minor number, and in absence of user entry of said minor
5 number, a default minor number is used.

16. A system according to claim 14, wherein
said major number is associated with a broadcast information
provider.
10

17. A system according to claim 12, including the step of
selecting said program guide containing mapping information from
said plurality of different available program guides including said program guide
omitting said mapping information.
15

18. A system according to claim 12, including the step of
displaying at least one of, (a) said first broadcast channel number,
and (b) said second channel number, together with said program, in response to
user entry of said first broadcast channel number.
20

19. A system according to claim 18, wherein
said first broadcast channel number comprises a major number and
a minor number, wherein
said major number is associated with both an information provider
25 and a group of sub-channels, and
said minor number identifies a sub-channel from among said group
of sub-channels.

20. A system according to claim 12, wherein
said first broadcast channel number comprises a major number and
a minor number, wherein
- 5 said major number is associated with both an information provider
and a group of sub-channels, and
 said minor number identifies a sub-channel from among said group
of sub-channels, and
 said second channel number is a transmission channel identification
10 number, and
 said tuning step includes tuning to receive a sub-channel comprising
said second channel in response to user entry of said transmission channel
identification number and said minor number.
- 15 21. In a video decoder, a system for acquiring packetized program
information comprising a program conveyed on one of a plurality of broadcast
channels, comprising the steps of:
- receiving at least one of, (a) a virtual channel identification number
and (b) a transmission channel identification number, said transmission channel
20 conveying packetized program information comprising a program;
 mapping said virtual channel number to said transmission channel
identification number;
 tuning to receive said transmission channel using said transmission
channel identification number in response to user entry of either one of, said
25 virtual channel identification number, and said transmission channel identification
number; and
 acquiring said packetized program information comprising said
program conveyed on said transmission channel.

22. A system according to claim 21, including the step of displaying at least one of, (a) said virtual channel identification number, and (b) said transmission channel identification number, together with
5 said program, in response to user entry of said first broadcast channel number.

23. A system according to claim 22, wherein said virtual channel identification number comprises a major number and a minor number, wherein
10 said major number is associated with an information provider and a group of sub-channels, and
said minor number identifies a sub-channel from among said group of sub-channels.

15 24. In a video decoder, a system for tuning to acquire packetized program information comprising a program conveyed on one of a plurality of broadcast channels identified by a virtual channel identification number including a major number associated with an information provider and a group of sub-channels and a minor number identifying a sub-channel from among said group
20 of sub-channels, comprising the steps of:

navigating within a first list, including a plurality of broadcast channels, to identify and select a broadcast channel and an associated virtual channel identification number, in response to user activation of a first navigation control;

25 navigating within a second list of a group of sub-channels associated with said selected broadcast channel to identify and select a sub-channel and an associated minor number, in response to user activation of a second navigation control;

tuning to receive a selected broadcast channel using said selected
30 virtual channel identification number; and

acquiring packetized program information comprising a program conveyed on said broadcast sub-channel using said minor number.

25. A system according to claim 24, wherein
said first navigation control comprises a control for incrementally or
decrementally traversing through numbered broadcast channels, and
5 said second navigation control comprises a control for incrementally
or decrementally traversing through numbered sub-channels.

26. A system according to claim 24, wherein
said first and second navigation controls use the same user
10 activated remote control unit button.

27. A system according to claim 24, wherein
said first and second navigation controls use different user activated remote
control unit buttons.

15 28. A system according to claim 24, wherein
said first navigation control comprises a control for incrementally or
decrementally traversing through a displayed menu listing numbered broadcast
channels, and
20 said second navigation control comprises a control for incrementally
or decrementally traversing through a displayed menu listing numbered sub-
channels.

29. A system according to claim 24, including the steps of
25 generating a displayed menu listing numbered broadcast channels
incrementally or decrementally traversed in response to said first navigation
control, and
generating a displayed menu listing numbered sub-channels
incrementally or decrementally traversed in response to said second navigation
30 control.

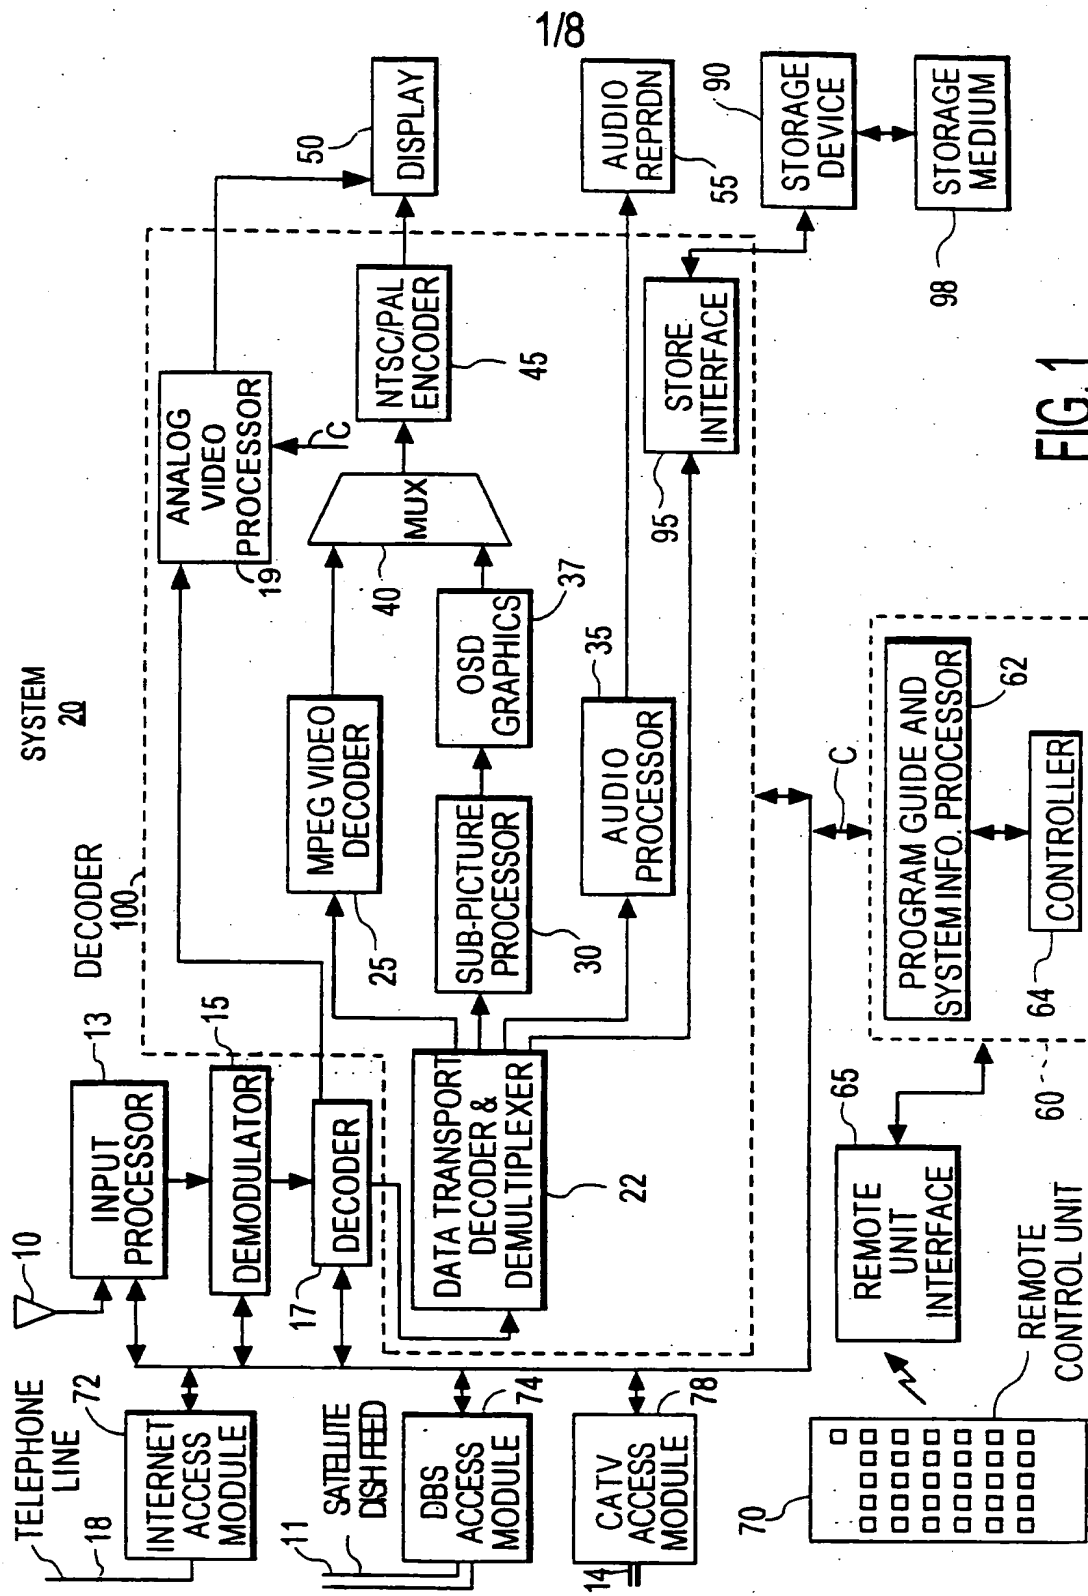
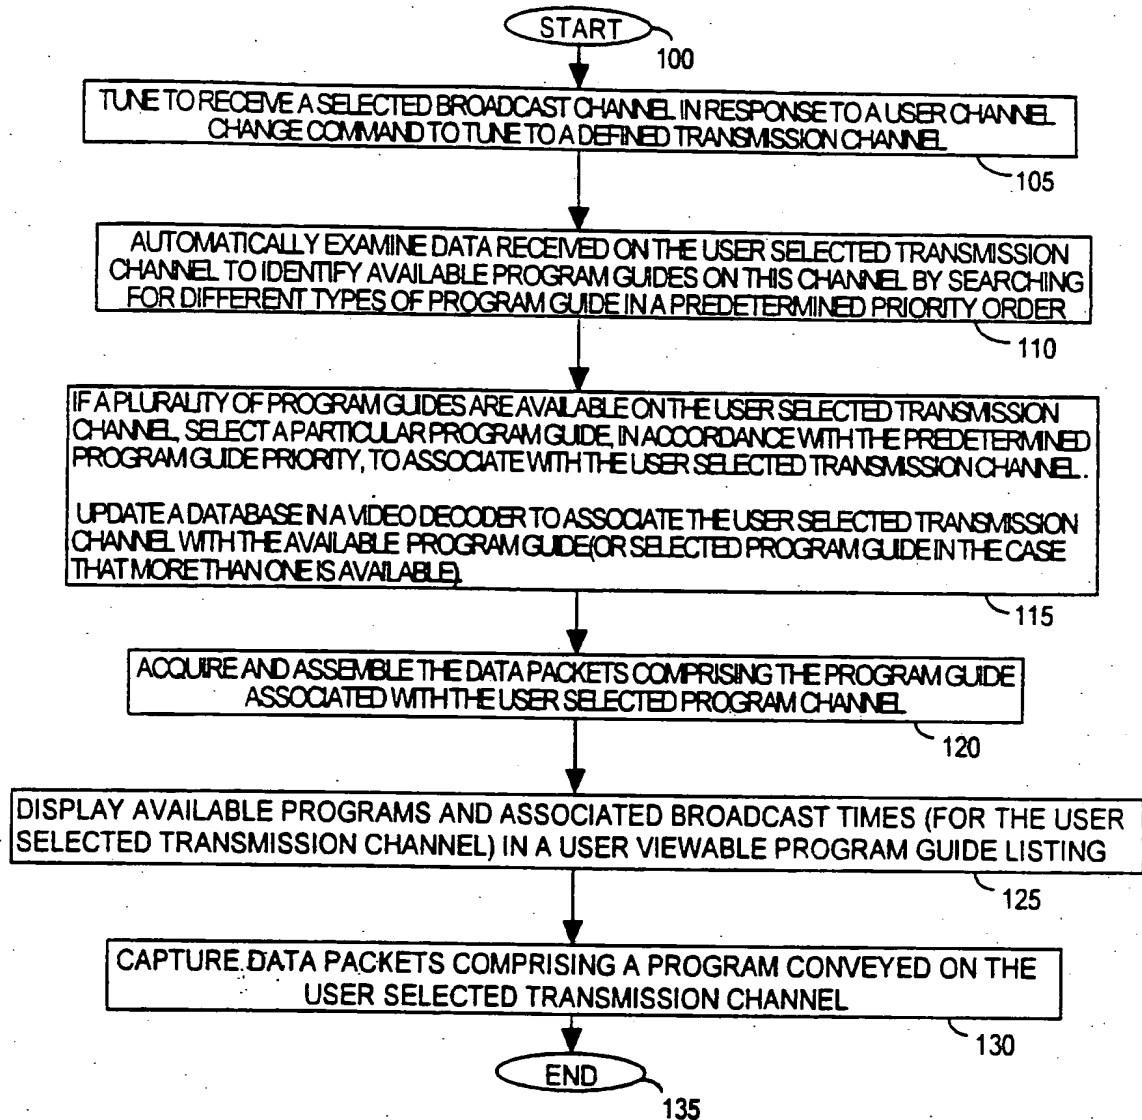
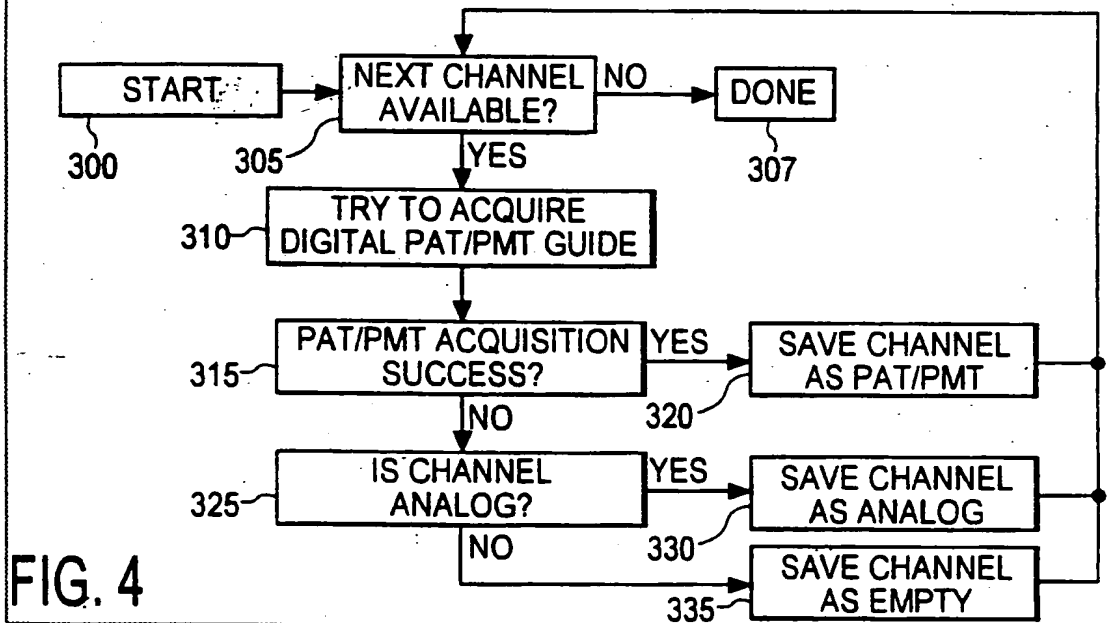
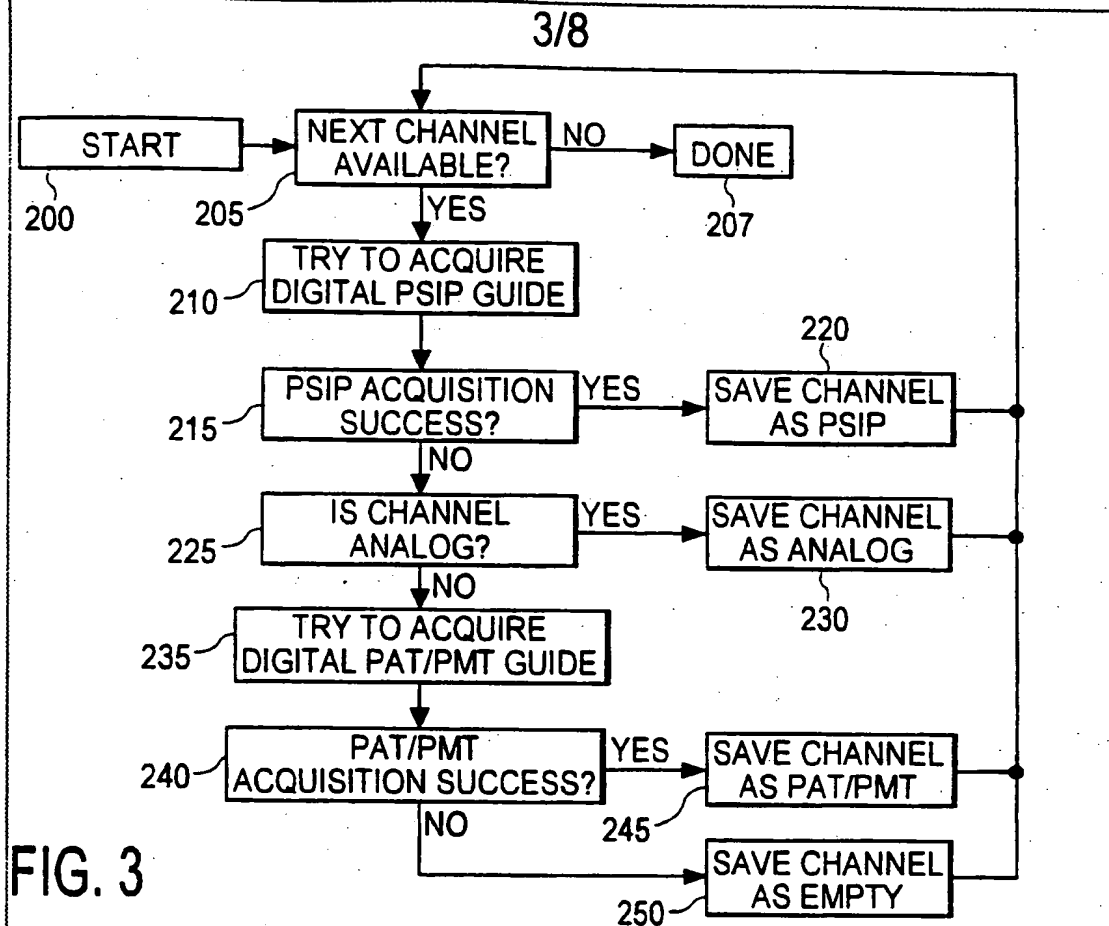


FIGURE 2

2/8






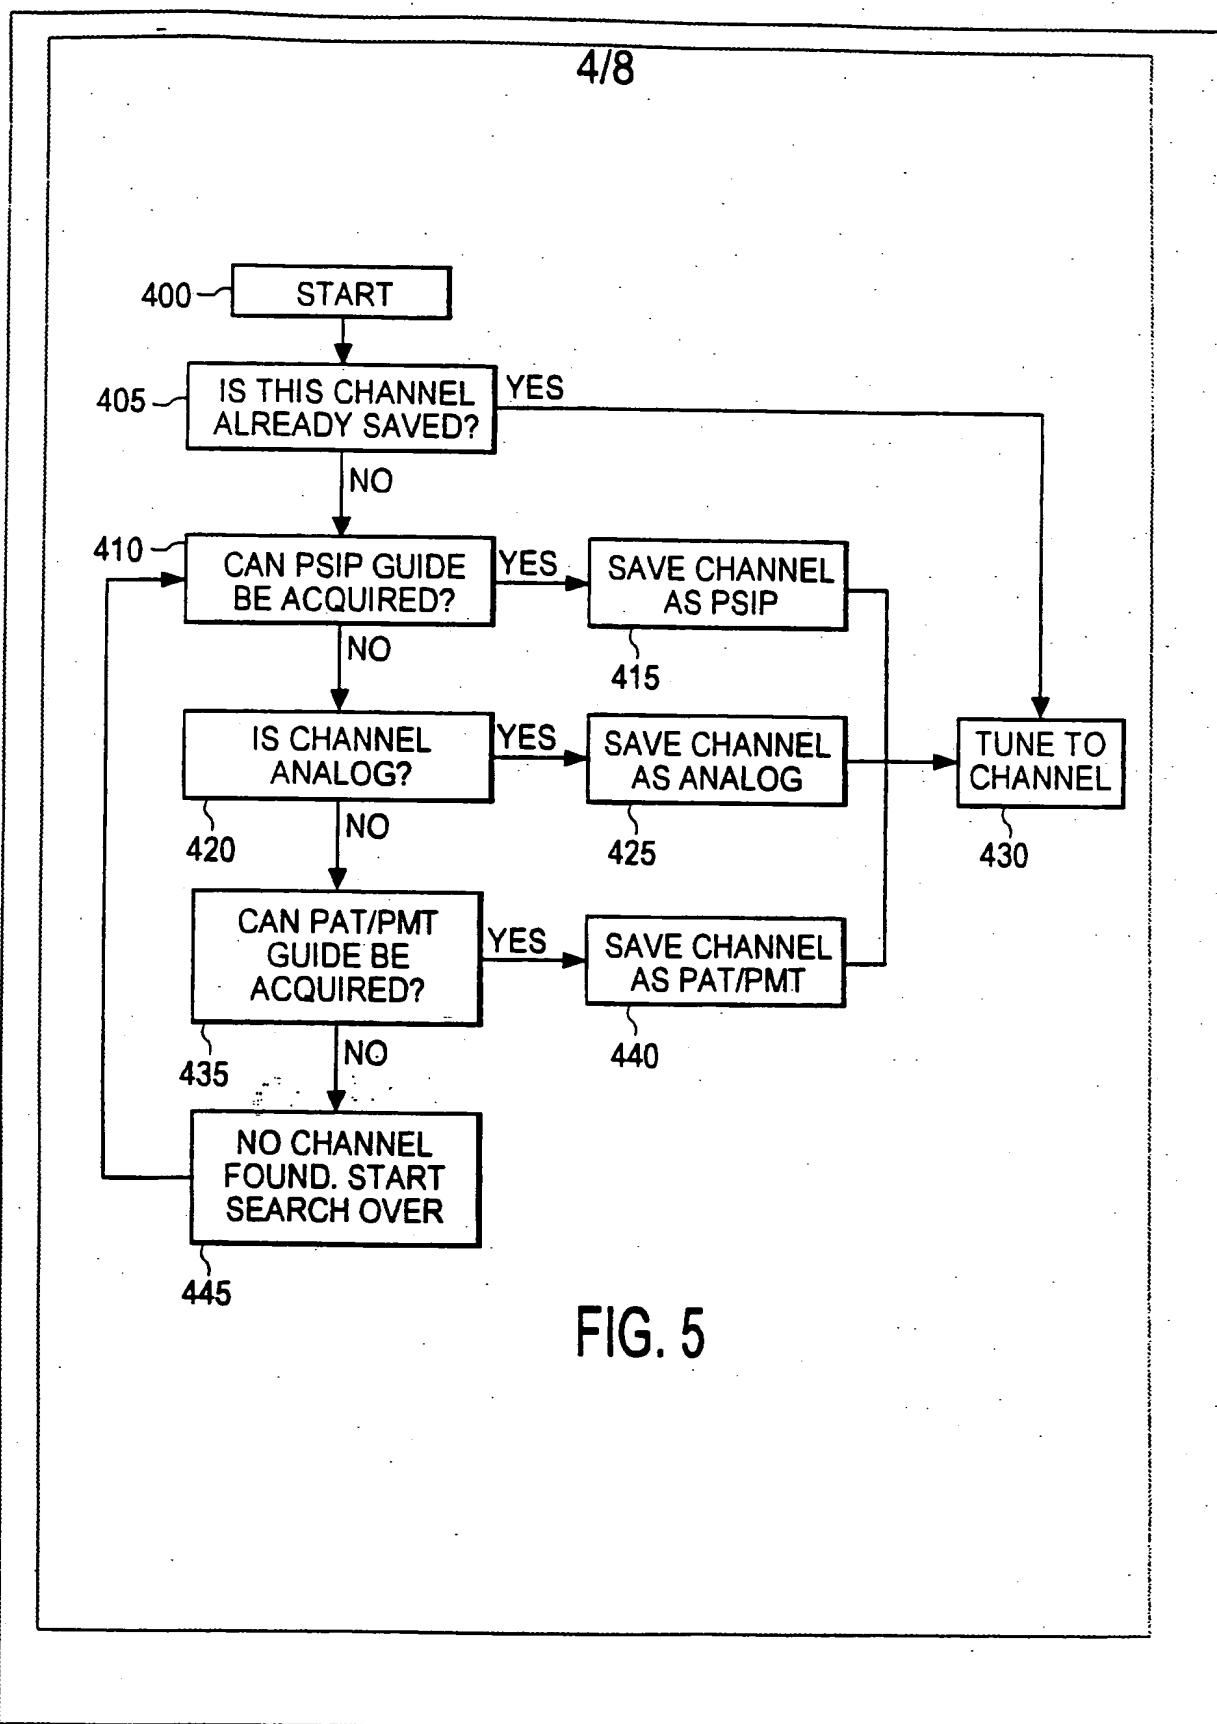


FIG. 5

FIGURE 6

5/8

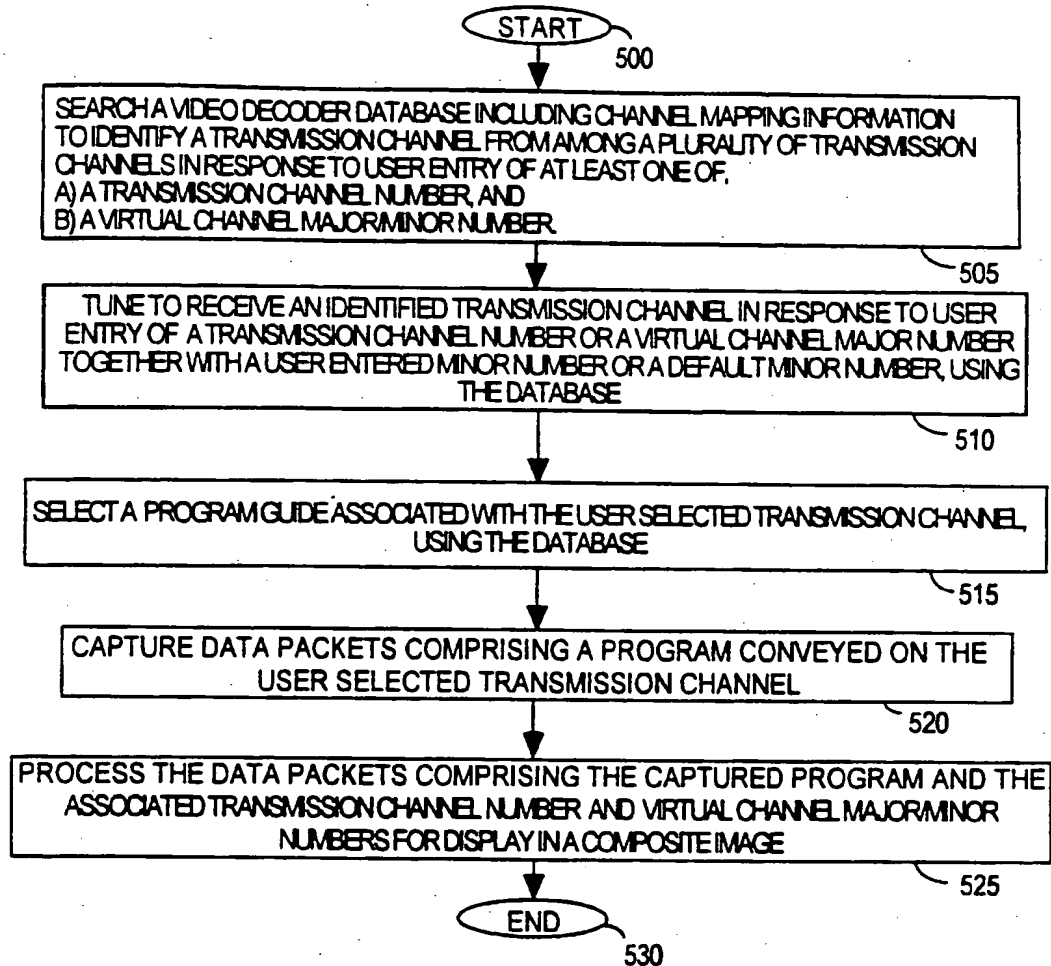

6/8

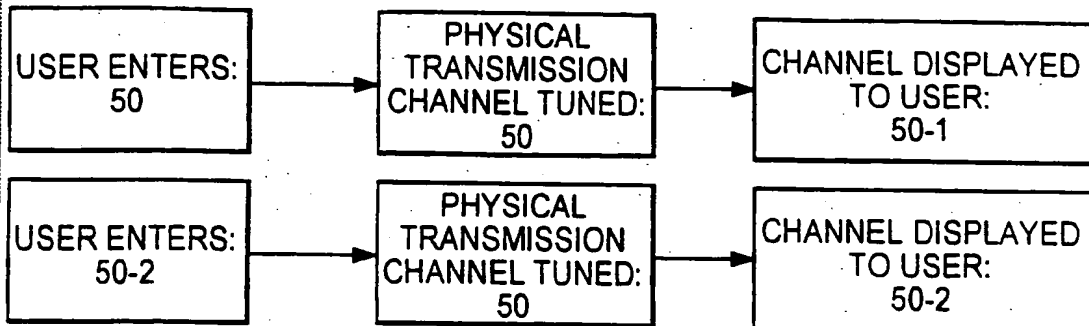


FIG. 7

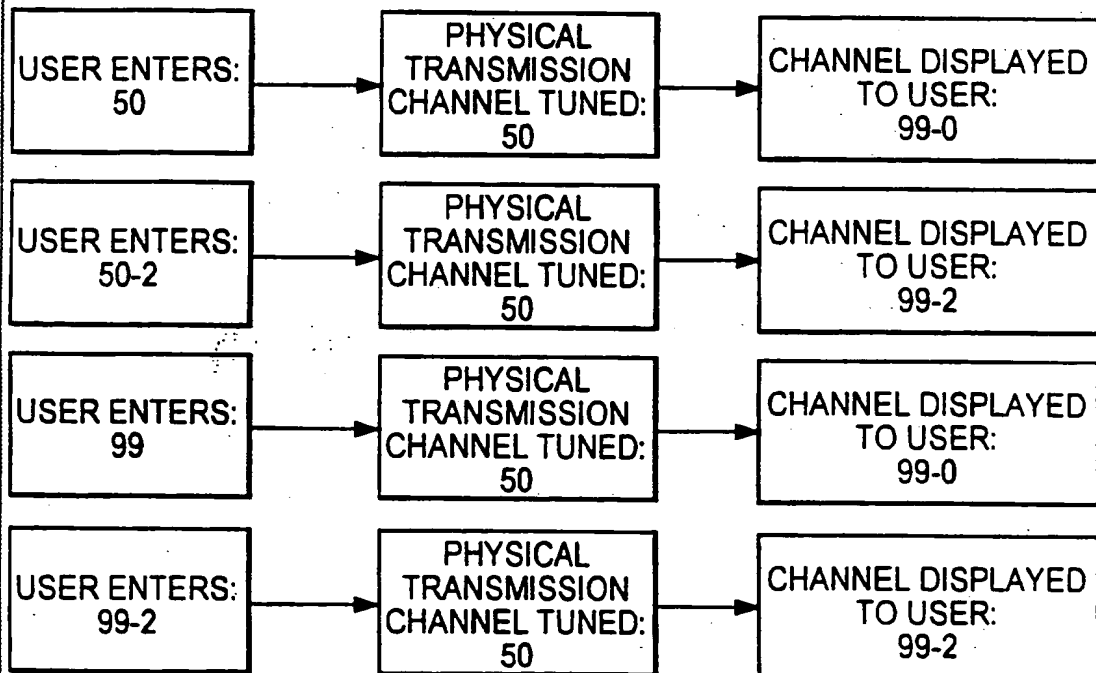


FIG. 8

FIGURE 9

7/8


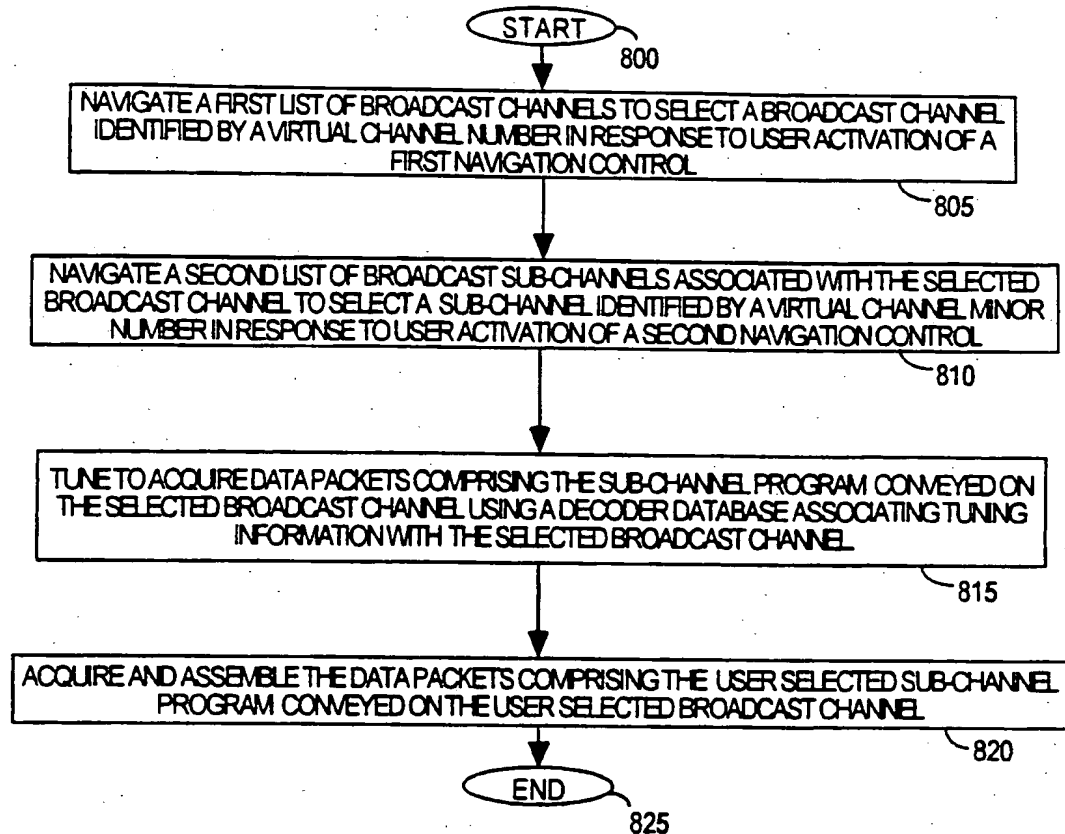


FIGURE 10

8:13 P.M. 14 APRIL 1997

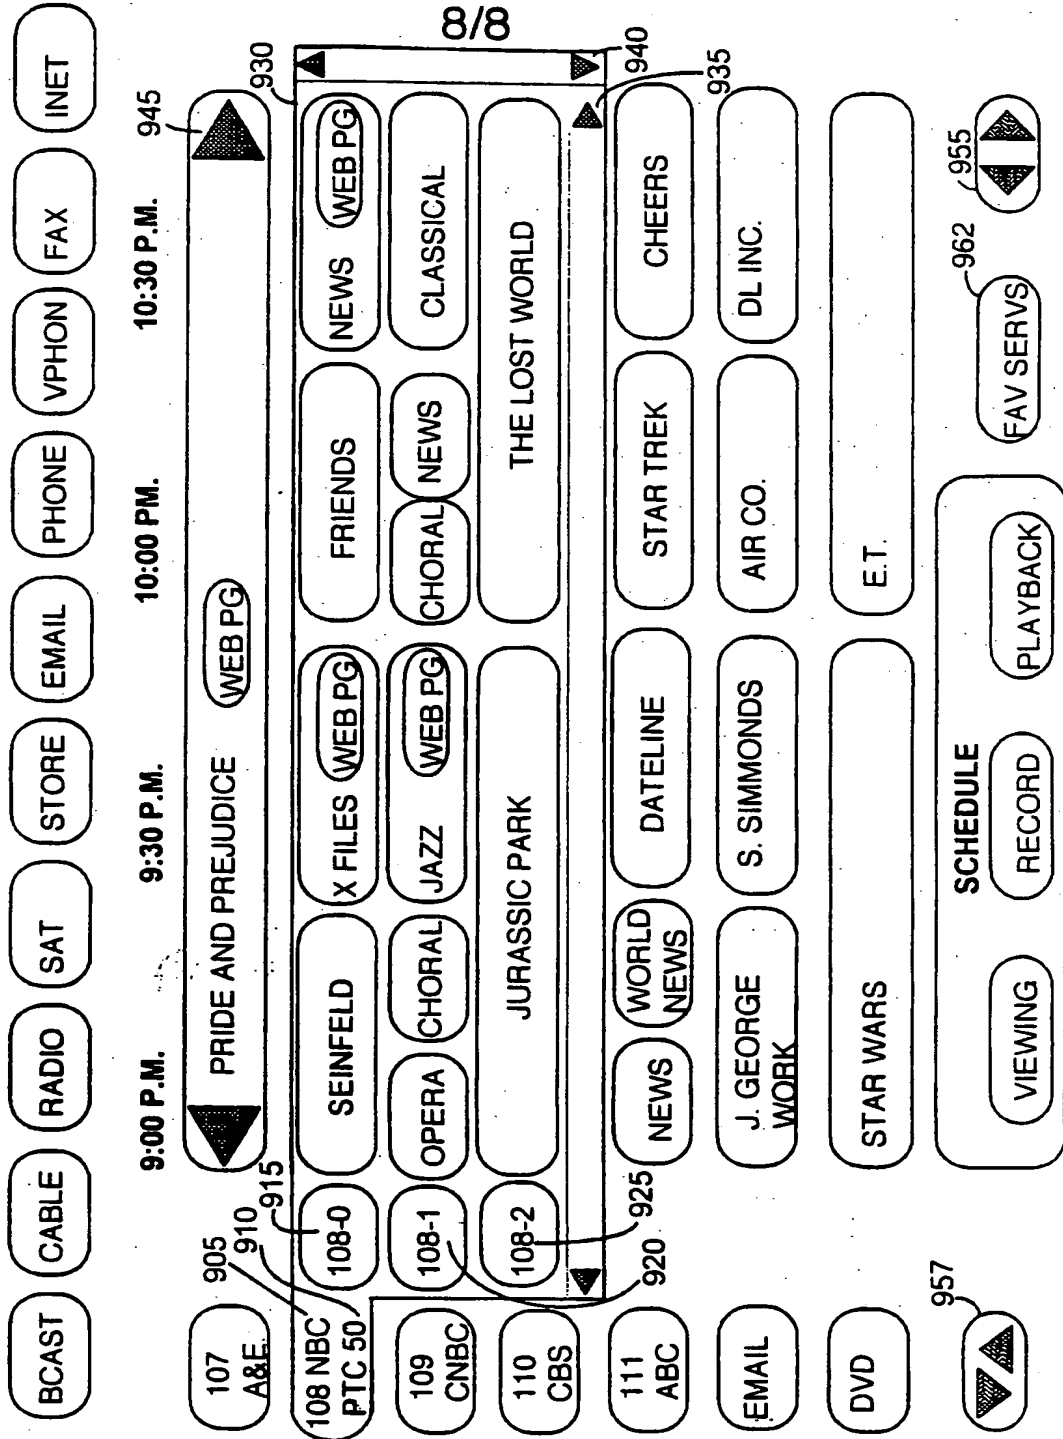

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 00/13894

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 99 35822 A (AMIGA DEV LLC) 15 July 1999 (1999-07-15) page 6, line 12 -page 8, line 31 figures 3-6	1,2, 10-13,21
P,X	EP 0 921 689 A (MATSUSHITA ELECTRIC IND CO LTD) 9 June 1999 (1999-06-09) column 61, line 1 -column 62, line 42 figures 51A,51B	24,28,29
X	EP 0 849 954 A (NEXTLEVEL SYSTEMS INC) 24 June 1998 (1998-06-24)	24-27
Y	abstract page 3, line 36 -page 3, line 52 page 4, line 41 -page 5, line 18 page 7, line 50 -page 8, line 7 table 2 claims 1,25	28,29
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

7 September 2000

Date of mailing of the international search report

15/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hampson, F

INTERNATIONAL SEARCH REPORT

Intern. Application No.
PCT/US 00/13894

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 41477 A (TV GUIDE ON SCREEN) 19 December 1996 (1996-12-19)	1-27
Y	page 19, line 1 -page 20, line 37 figure 5	28,29
A	US 5 301 028 A (BACON KINNEY C ET AL) 5 April 1994 (1994-04-05) abstract column 9, line 56 -column 10, line 54 figures 4B,5,6,7	1-23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/13894

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9935822 A	15-07-1999	US 6003041 A AU 1951199 A	14-12-1999 26-07-1999
EP 0921689 A	09-06-1999	JP 11168666 A AU 706965 A	22-06-1999 01-07-1999
EP 0849954 A	24-06-1998	US 5982411 A CA 2224926 A CN 1193241 A JP 11046357 A	09-11-1999 18-06-1998 16-09-1998 16-02-1999
WO 9641477 A	19-12-1996	US 5585866 A AU 705839 B AU 6092996 A BR 9608903 A CA 2223018 A EP 0830787 A PL 323830 A	17-12-1996 03-06-1999 30-12-1996 21-09-1999 19-12-1996 25-03-1998 27-04-1998
US 5301028 A	05-04-1994	AU 658796 B AU 3146493 A WO 9311641 A US 5497187 A	27-04-1995 28-06-1993 10-06-1993 05-03-1996